

BLUEVOLUTION 82

WINDOW AND DOOR SYSTEM.



0,77	3	6	82	R	A
Uw for Ug = 0.5 (Ultimate spacer bar)	gaskets	chambers (frame)	construction depth (mm)	renovation	aluminium cover



standard hardware with 6
anti-theft points



standard blockade of
incorrect handle position (RU
windows)



glazing with packages up
to 53 mm wide

BLUEVOLUTION 82


The optimal combination of innovative technology and the best thermal protection parameters, appropriate for energy-saving construction. Windows made in the BluEvolution 82 system are already equipped as standard with a two-chamber package of warm glass with a heat transfer coefficient of $U_g = 0.5 \text{ W} / \text{m}^2\text{K}$.

A huge advantage is the profiles themselves, which are not only made of high-quality PVC, but above all are an excellent thermal insulator, which is guaranteed by the six-chamber structure of the profile and the triple sealing system. The installation depth of 82 mm allows for glazing with packets up to a width of 53 mm. If the window is also supplemented with a warm spacer, we can obtain thermal transmittance parameters corresponding to those of energy-saving windows, additionally reducing the risk of temporary condensation of water vapor.

The profiles are made of the highest quality PVC, thanks to which they are characterized by a unique, shiny, snow-white color.

BLUEVOLUTION 82

Bluevolution 82 variants

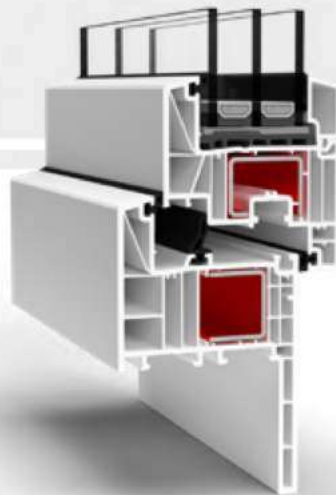

RENOVATION 60 MM | 35 MM



ALUMINIUM COVER

SALAMANDER

					
SAL 03	SAL 11	SAL 18	SAL 19	SAL 21	SAL 25
					
SAL 26	SAL 27	SAL 33	SAL 37	SAL 39	SAL 41
					
SAL 42	SAL 43	SAL 50	SAL 51	SAL 52	SAL 55
					
SAL 59	SAL 67	SAL 69	SAL 71	SAL 72	SAL 73
					
SAL 74	SAL 78	SAL 84	SAL 87	SAL 88	SAL 90
					
SAL 92	SAL 93	SAL 94	SAL 98	SAL 107	SAL 108
					
SAL 109	SAL 110	SAL 111	SAL 112	SAL 113	SAL 115
					
SAL 116					

WINDOWPANES

The selection of a glazing package is often limited to the selection of the number of panes, which makes them more or less energy-efficient. However, our offer is much wider. We offer energy-saving, sound-absorbing, safe, anti-burglary and anti-dazzle glass panes. Additionally, we have a wide range of ornamental glass, in several dozen designs to choose from.

The inter-pane space of the formed units is usually filled with 90% argon. We also offer krypton-filled glass, thanks to which it is possible to obtain a heat transfer coefficient of up to $0.3 \text{ W} / \text{m}^2\text{K}$.

The possibility of joining different types of glass and a smaller or larger number of panes allows for obtaining the appropriate parameters for each type of windows and doors from our offer.

We present a summary of the basic types of insulating glass with a description of their functions:



1-chamber glazing packages

Single-chamber, double glazing composed of two glass panes. It is a standard for basic window and door systems.



2-Double-chamber glazing

Double-chamber, double glazing, increasing thermal comfort in the room. Separation of the inter-pane space with an additional glass pane significantly reduces heat transfer.



Sound-absorbing

Insulating glass units with a special acoustic foil provide an increased level of soundproofing.



Secure

Laminated and / or toughened panes increase safety. Their puncture or shatter resistance is adjusted to the customer's requirements.



Solar control

Panels that reduce the flow of light and solar energy into the room. They are offered with selective, absorbent or reflective glass.



Fireproof

Single windowpanes, single or double glazed units with fire resistance class EI30 or EI60.

DECORATIVE WINDOWPANES

Insulating glass with decorative glass is perfect a choice for windows, doors and partitions. Decorative panes will work in homes, offices, shops, hotels and restaurants.

Depending on the chosen pattern, they can not only increase privacy, but also brighten the interior, making it optically larger, which is another advantage.

In addition to standard glass with a matte coating, we also offer ornamental glass with the following patterns:



Aldeutsch* white



Chinchila* white



Crepi white



Delta white mat



Delta* white



Flutes white mat



Kathedral white



Master-Ligne



Master-Carre



Hen* white



Niagara white



Niagara white mat



Silvit* white



Master-Point



Monumental M



Waterdrop



Partially blasted



Stadip 33.1 PVB Mat



Planibel Dark Grey

* also in brown

MUNTIN BARS

The muntin bars give the windows an elegant and unique character, and in some cases are an indispensable decorative element referring to the old architectural style. Our offer includes both glazing bolections, glued on the glass, and Viennese bolections (the so-called duplex). Each offered type is available in several widths and many colours.



SPACER BARS SWISSPACER ULTIMATE

In addition to the standard frame made of aluminium, we also offer one of the best warm spacer bars available in the world.

With the Swisspacer Ultimate spacer bar, the Ψ factor is only $0.03 \text{ W} / \text{m}^2\text{K}$. The lower value of this coefficient not only reduces the possibility of water vapor condensation on the periphery of the glass, but also allows for a significant reduction of the thermal transmittance coefficient for the entire window.

The frames are available in several colours from the RAL palette.



PVC SYSTEM WINDOW SILLS

System window sills combine aesthetics with the highest quality. Their smooth surfaces are easy to clean, resistant to bumps and scratches. Available in various variants and colours matching the colour of the ordered joinery.



EXTERNAL WINDOW SILLS

You can choose window sills made of aluminium or steel. They are characterized by very good quality and resistance to weather conditions. They are aesthetic, durable, non-flammable, resistant to moisture and chemicals. Thanks to the drip caps they provide ideal protection for the façade.



INTERNAL CHAMBER WINDOW SILLS

They are made of hard polyvinyl chloride, the same that is used in the production of PVC windows and doors. Coated with foil with high resistance to scratching and UV rays. The chamber structure ensures the rigidity of the structure. Window sills are available in many colours.



WINDOW AIR VENTS

Ventilators provide not only constant access of fresh air to the interior, but also allow the removal of moisture from the room. It is a convenient way to ventilate rooms without having to open windows, which is especially important in winter. Diffusers are mounted in the shaft rebate, on the upper frame and sash profiles or under the seal.

We offer diffusers with various methods of air supply control - hygroscopic, pressure and manual.

Each diffuser from our offer has appropriate certificates confirming their proper operation in various conditions.




ANTI-THEFT FITTINGS

Clients, who above all value their own and their closest safety, we can assure that by choosing a PVC window in one of the presented systems, the safety comfort will always be on a proper level.

Depending on the chosen system, in standard there are from 2 up to 5 safety points. Special plug and hooks located in specific spots make it very difficult to force the door during a burglary attempt.

For people who want to keep the safety comfort even on a higher level, we also offer fittings with increased durability which is characterized by an increased amount of safety points.

In order to provide a maximum safety for the entire window, we also recommend choosing handles with blockade function in the closed position and glued, safe glass. Those options partially provide a maximum protection by creating a tight barrier for any burglars.

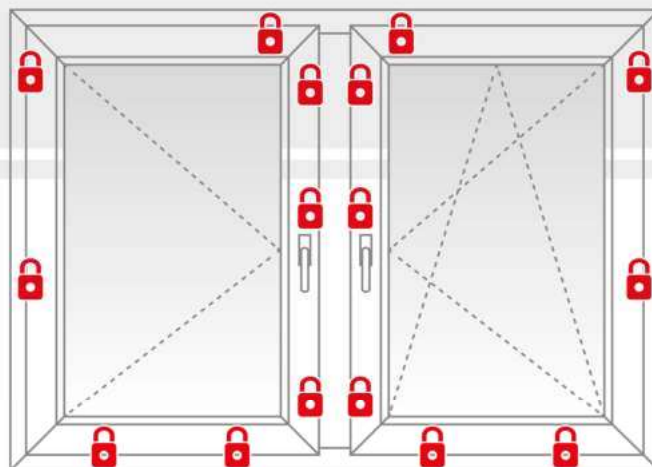

The number of anti-burglary points depends on the structure and dimensions of the window.

WINDOW HANDELS

HANDLE **ALU**



HANDLE **KWADRO**



HANDLE **NEW YORK**



HANDLE **DUBLIN/DUBLIN DE LUXE**



HANDLE TBT **1005A**



HANDLE **HAMBURG**



HANDLE **MOONLINE**



HANDLE **VICTORY**



HANDLE **TOULON**



HANDLE **OVERTURE LOCK**



HANDLE **LUXEMBOURG**



HANDLE **ATLANTA**



The availability of a given handle model depends on the selected window system...