

BESTSELLER

Series DPQ-76

New standard!
Optimal performance parameters
in accordance with requirements.

- + **FAVORABLE THERMAL INSULATION PROPERTIES** in accordance with building requirements
- + Approved quality with **A GUARANTEE OF PEACE OF MIND**
- + The perfect balance of **QUALITY AND PRICE**



FITTING

Solution with microventilation, four-stage tilt mechanism, dual-function element and anti-burglary catch



HANDLE

Universal design of the 1006 model

DPQ-76SERIES



U Factor = 0,14* Btu/h·ft²·F

$U_w = 0,8^* \text{ W/m}^2\text{K}$

- 5-chamber class A profile, 3in thick (76 mm)
- Steel within the frame
- Three seals: two edge seals retracted from elastomer EPDM, inner thermo-weldable with TPE
- Dimensions for a single sash tilt-and-turn window: Max. width 59 1/16in (1500 mm), max. height 97 7/16in (2475 mm)
- Maximum sash area 24 1/4ft² (2.25m²)

*Glass: 4/14/4/14/4, gas: argon, warm edge spacer, window size: 48 7/16in x 58 4/16in (1230 mm x 1480 mm)

DPP-70SERIES



U Factor = 0,17* Btu/h·ft²·F

$U_w = 0,96^* \text{ W/m}^2\text{K}$

- 5-chamber class A profile, 2 3/4in (70 mm) thick
- Steel within the frame
- Two EPDM elastomer retractable seals
- Dimensions for a single sash tilt-and-turn window: Max. width 59 1/16in (1500 mm), max. height 101 3/8in (2575mm)
- Maximum sash area 24 1/4ft² (2.25m²)


*Glass: 4/14/4/14/4, gas: argon, warm edge spacer, window size: 48 7/16in x 58 4/16in (1230 mm x 1480 mm)

The colors of your place on Earth

Colors of windows and patio doors


JOINERY
VINYL

BASIC COLORS

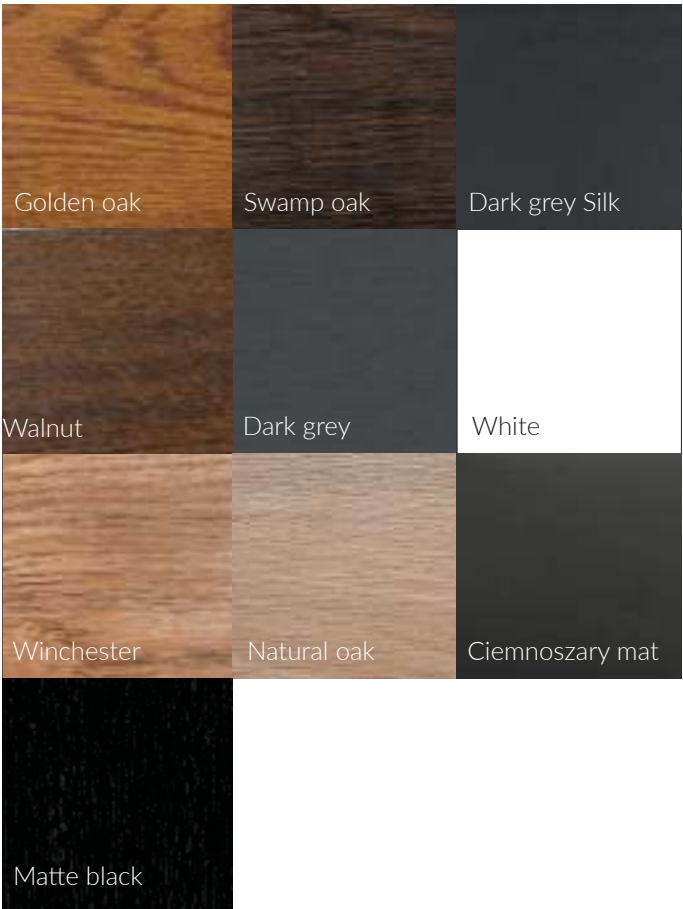

SPECIAL COLORS

The most popular customer choices

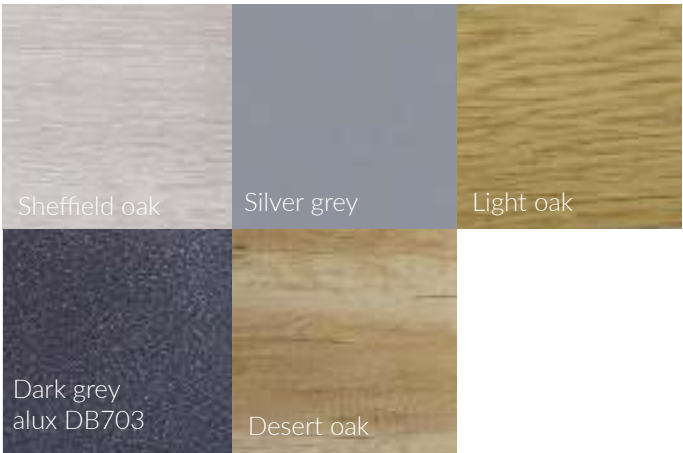

SPECIALTY COLORS

Other colors



You can check the full range of VINYL colors available on our website
www.dakowindows.com
or in our showrooms