


MASTERLINE 8

WINDOW SYSTEM



TECHNICAL DATA	Masterline 8
Frame depth (window)	77 mm
Sash depth (window)	87 mm
Glazing thickness (fixed window / opening windows)	do 62 mm
MIN. VISIBLE WIDTH OF SECTIONS	
Frame (window)	53 mm
Sash (window)	20 mm (invisible)
MAXIMUM DIMENSIONS AND WEIGHT OF THE CONSTRUCTION	
Maximum dimensions of the TT	H up to 2800 mm L up to 1200 mm
Max weight of the sash (window)	200 kg

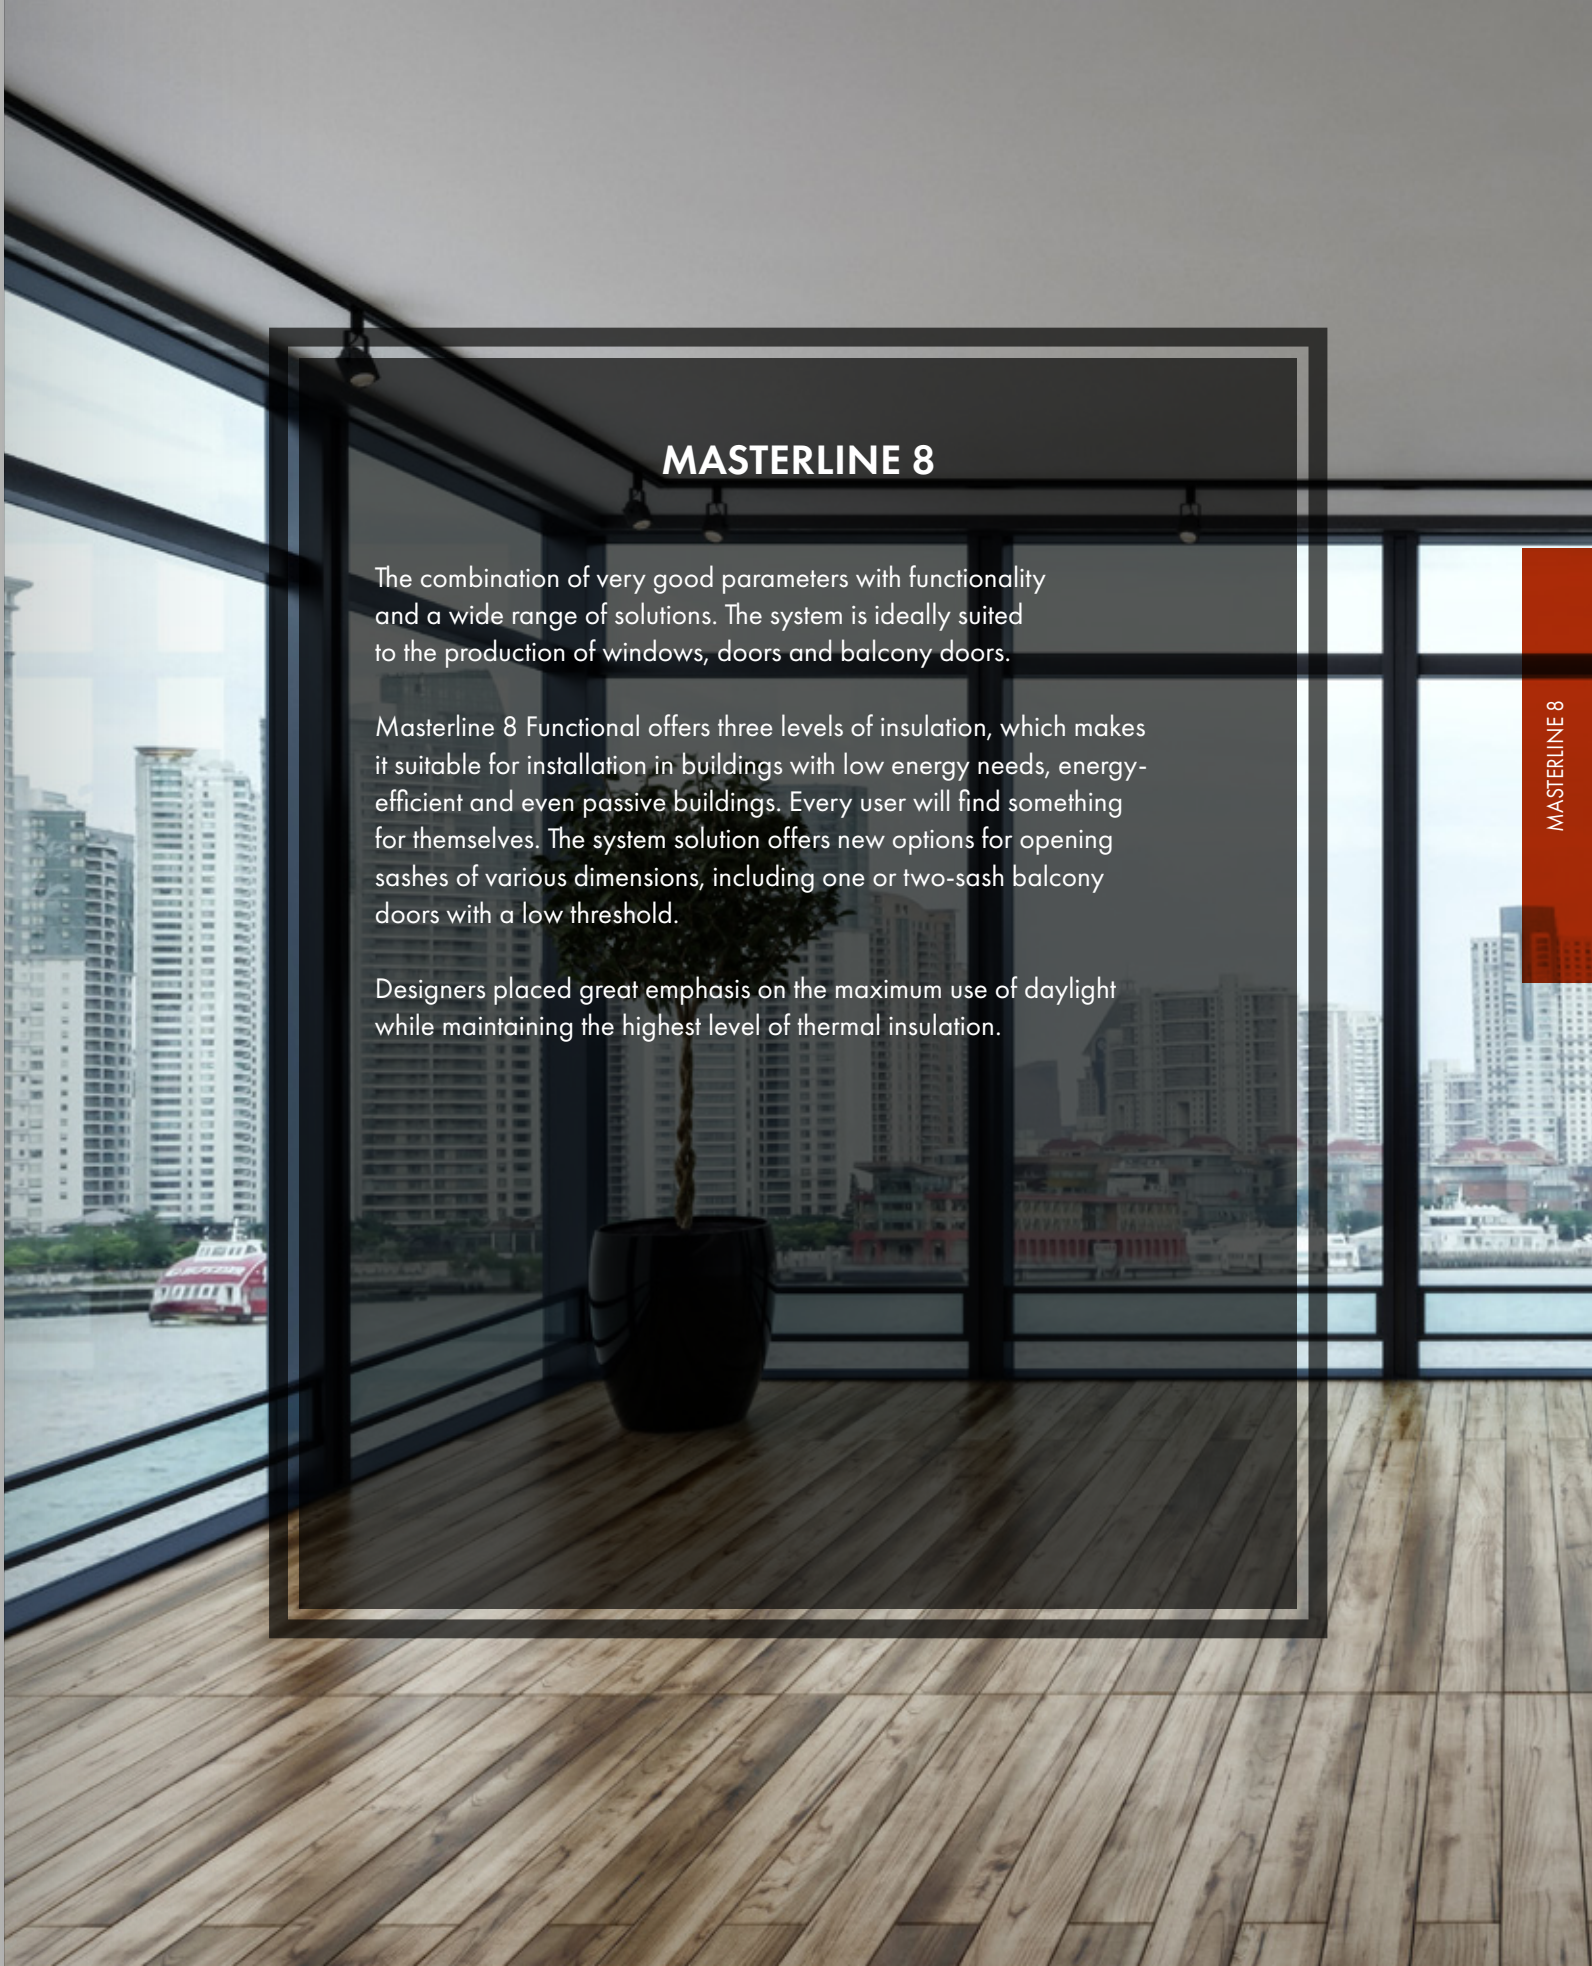

MASTERLINE 8

The combination of very good parameters with functionality and a wide range of solutions. The system is ideally suited to the production of windows, doors and balcony doors.

Masterline 8 Functional offers three levels of insulation, which makes it suitable for installation in buildings with low energy needs, energy-efficient and even passive buildings. Every user will find something for themselves. The system solution offers new options for opening sashes of various dimensions, including one or two-sash balcony doors with a low threshold.

Designers placed great emphasis on the maximum use of daylight while maintaining the highest level of thermal insulation.

COLOURS

Aluminium profiles create unlimited possibilities. To achieve the desired colour effect, the windows can be varnished using RAL K7 palette colours or wood-like coatings.

